. SERVITUDE DGM.

KANTOORAFSKRIF

SIDES Metres		ANGLES of DIRECTION		CO-ORDINATES System Lo 23° Y	CO-ORDINATES System Lo 23° X
		Constants	±	0,00	+3 500 000,00
AB	2 860,66	37.44.39	A	- 6 109,12	+ 52 402,47
BC	14 486,60	47.08.34	B	- 4 358,00	+ 54 664,54
			C	+ 6 261,43	+ 64 517,93
DE	9 857,65	53.39.34	D	- 9 068,50	+ 53 553,23
			E	- 1 128,06	+ 59 394,70
	(59)	Nelspoort	△	- 3 322,28	+ 53 945,42
	(239)	Combrinkskraal	△	- 9 339,79	+ 54 019,98

S.G.No. 6713-86

Approved


for Surveyor-General

1986.09.23

Description of Beacons

A,B..... 20mm Iron peg in base of lattice tower.
C,D,E..... 20mm Iron peg and cairn in base of lattice tower.

The extent and width of the Servitude is 23,50 metres on either side of the lines aBb and cd.

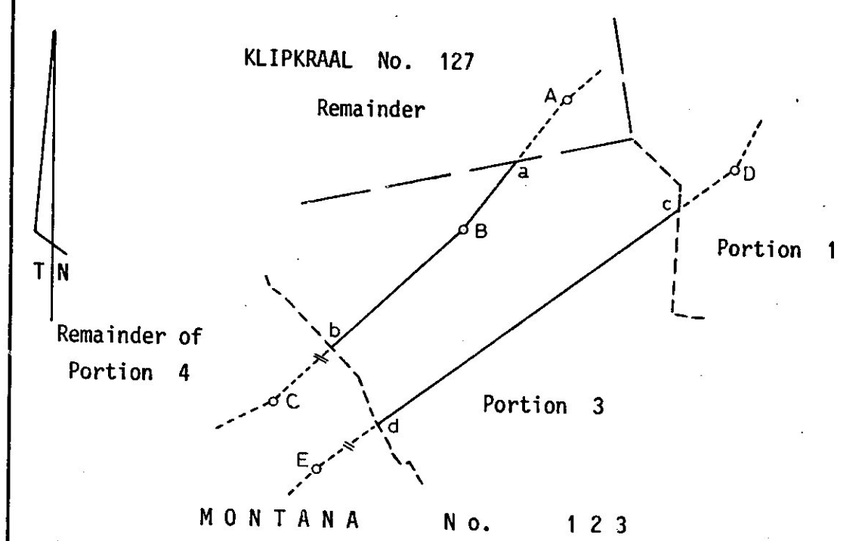

Scale:- 1:100 000

The lines aBb and cd represent the centre lines of ~~an~~ Electric Power Transmission Servitudes over

Portion 3 of the farm MONTANA No. 123

situate in the Administrative District Beaufort West Province of CAPE OF GOOD HOPE

Surveyed in February 1986 by me

A.W.Reynolds Land Surveyor

This diagram is annexed to Deed of Servitude No. dated K 251/90s i.f.o. ESCOM Registrar of Deeds	The original Diagram is No. 6047/1945 Transfer/~~Grant~~ No. 1946.431.21549	File BFT.W. 123 S.R. No. E 979/86 Comp. No. CM - 1 (4593) Gen.Plan

MICROBOX