SERVITUDE DGM.

KANTOORAFSKRIF

SIDES Metres		ANGLES of DIRECTION		CO-ORDINATES Y	CO-ORDINATES System Lo 23 X
		Constants	±	0,00	+3 500 000,00
AB	7 279,09	49.19.20	A	- 11 629,50	+ 47 657,94
			B	- 6 109,12	+ 52 402,47
CD	6 118,61	27.27.45	C	- 11 890,21	+ 48 124,11
			D	- 9 068,50	+ 53 553,23
	(238)	Bruinrug	Δ	- 11 089,23	+ 46 791,78
	(239)	Combrinkskraal	Δ	- 9 339,79	+ 54 019,98

S.G.No. 6709-86

Approved


for Surveyor-General

1986.09.23

Description of Beacons.

A,B,C..... 20mm Iron peg in base of lattice tower.
D..... 20mm Iron peg and cairn in base of lattice tower.

The extent and width of the Servitude is 23,50 metres on either side of the lines ab and cd.

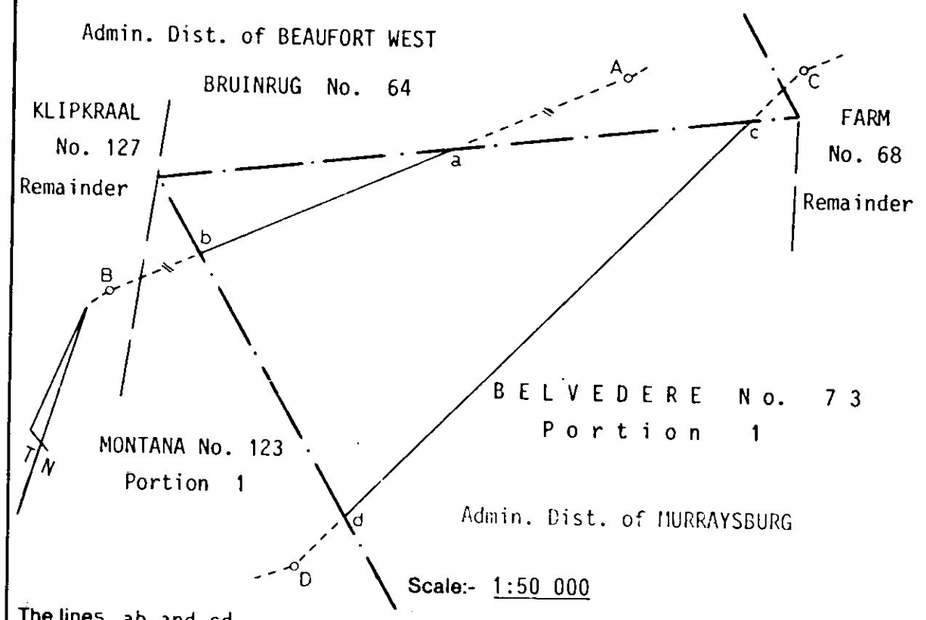

The lines ab and cd represent the centre lines of ~~an~~ Electric Power Transmission Servitudes over

Portion 1 of the farm BELVEDERE No. 73

situate in the Administrative District Murraysburg Province of CAPE OF GOOD HOPE

Surveyed in February 1986 by me

A.W.Reynolds Land Surveyor

This diagram is annexed to Deed of Servitude No. dated K271/89s i.f.o. ESCOM Registrar of Deeds	The original Diagram is No. 6050/45 Transfer/~~Grant~~ No. 1946.393.19616	File MURBG. 73 S.R. No. E 979/86 Comp. No. CM - 1 (4593) Gen.Plan

Servitude 6709/86